


LynxNet Strobe3LED

SKU #950-LYNX-ST-P-3

The Lynx-ST-P-3 indoor strobe is a PoE network device that has visual and audible alerts. Alerts are activated by the LynxGuide server. Alerts can be activated until an all clear is sent or a preset timer expires. Power can be PoE. Configuration is easy with the 12 VDC programming power supply (one per order) and a direct ethernet connection to a PC. Once configured the LynxNet Strobe3LED can operate on an optional 12 VDC power supply or the built in PoE module.

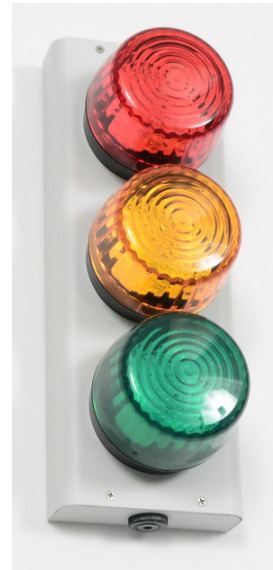

Features and Benefits

- Strobe choices: red, blue, amber, green with programmable audible tone
- Can be activated by any Lynx alarm
- Supervised by the LynxGuide server

GENERAL SPECIFICATIONS:

Width: 5.2"

Length: 14.0"

Height: 4.45"

Weight: 4.5 Lbs

Power: DC Power or PoE

PS Onput Voltage: 100-240 VAC

PS Output Voltage: 12 VDC, 1.0 amp

POE: Class 2, 5.5 Watts Max

Supervision Interval: Default 5 Minutes

Communication Protocol : The LynxNet hardware and Lynx Client software achieves bidirectional communication through a client-initiated, persistent socket session to the LynxGuide server on ports 10117-10121. No network ingress connections are required. All server communications are TLS encrypted. In addition to providing security, this method is ideal if the hardware is behind a gateway, as no NAT rules are required to achieve connectivity.