


Dual Temperature Sensor Transmitter

SKU #950-WLT-TMPD-EI



The wireless transmitter has an internal and external wireless sensor detecting temperature. When the temperature exceeds the high or low set points, it sends an alert to the LynxGuide server via the LynxNet WLS. When the temperature returns to the reset points, it sends an alert to the LynxGuide server via the LynxNet WLS.

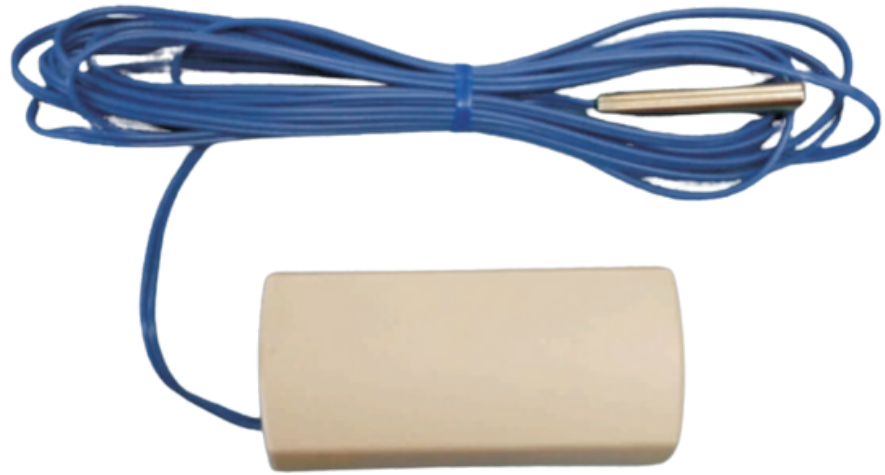

Features and Benefits

- Wireless dual internal and external temperature sensor
- Individual transmitters can be tested while other transmitters remain operational
- Transmitter signal and battery are supervised

GENERAL SPECIFICATIONS:

Width: 1.7"

Length: 3.5"

Height: 0.9"

Weight: 0.2 Lbs

Power: DC Power CR123A Battery

Input Voltage: 3 VDC

Supervision Interval: 5 Minutes

Communication Protocol: The 900MHz transmitter utilizes a unique frequency hopping, spread spectrum technology to meet the demands of an increasingly cluttered wireless world.