


Wireless Temperature & Humidity Transmitter

SKU #950-WLT-TMPH-E



The wireless, **external** sensor detects temperature and **internal** humidity. When the temperature or humidity exceeds the high or low set points, it sends an alert to the LynxGuide server via the LynxNet WLS. When the temperature or humidity returns to the reset point, it sends an alert to the LynxGuide server via the LynxNet WLS.

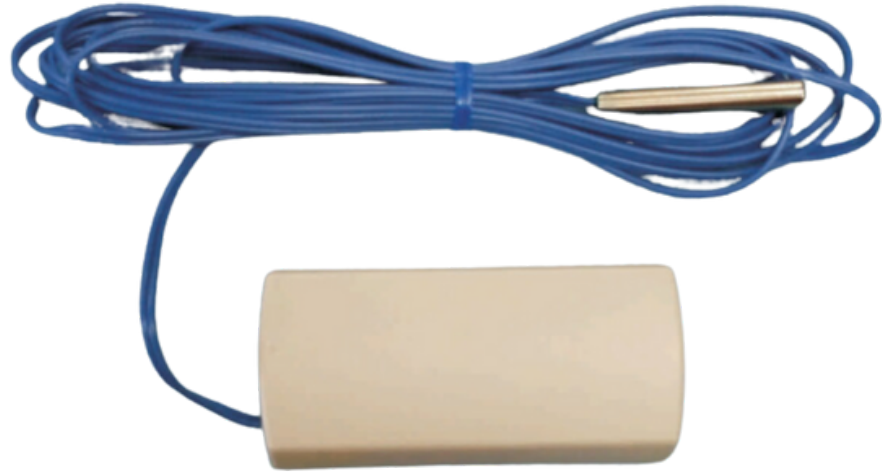

Features and Benefits

- Wireless external temperature and humidity sensor
- Individual transmitters can be tested while other transmitters remain operational
- Transmitter signal and battery are supervised

GENERAL SPECIFICATIONS:

Width: 1.7"

Length: 3.5"

Height: 0.9"

Weight: 0.2 Lbs

Power: DC Power CR123A Battery

Input Voltage: 3 VDC

Supervision Interval: 5 Minutes

SENSOR SPECIFICATIONS:

Width: 1.7"

Length: 3.5"

Height: 0.9"

Weight: 0.2 Lbs

Communication Protocol: The 900MHz transmitter utilizes a unique frequency hopping, spread spectrum technology to meet the demands of an increasingly cluttered wireless world.